





Our Mission

To be the first choice supplier for our customer's millwork and finish products needs.

Our skilled employees, each with a desire to excel, will provide quality products at competitive prices and deliver superior service to build lasting relationships with customers and vendors.

Return Policy

Merchandise Returns Must Be Authorized By A Trimco Representative

- Special orders are not subject to return.
- Damaged items are not subject to return unless noted at time of delivery.
- Cut, painted or stained items are not subject to return.
- Stock items may be returned if request is made within 60 days of purchase.
- Return merchandise to be inspected upon return to Trimco Millwork before final credit can be issued.
- 15% restocking/handling fees on returns within 60 days of Stock items with no credit allowed for crating and/or freight charges.
- NO RETURNS ALLOWED AFTER 60 DAYS.



Contents

Pine and Finger Joint Profiles	2–10
Oak Profiles	11–15
Ultralite Profiles.	16–19
Alder Profiles	20–22
Hemlock Profiles	23–26
Miscellaneous Profiles	27
Jambs and Frames	28–30
DRAWINGS NOT TO SCALE	




Coves



TM 85 9/16" x 1-3/4" SOLID PINE ONLY 8' ONLY




TM 93 3/4" x 3/4" SOLID PINE ONLY RL - 8'



CONCAVE PROFILE: USED AT CORNERS, PARTICULARLY AS A CEILING CORNICE.

SMALL **COVES**MAY BE USED
AS AN INSIDE
CORNER GUARD.



QUARTER ROUNDS



TM 105 3/4" x 3/4" SOLID PINE ONLY RL - 8'




TM 1081/2" x 1/2"
SOLID PINE ONLY
RL - 8'



TM 1093/8" x 3/8"
SOLID PINE ONLY
8' ONLY



TM 1101/4" x 1/4"
SOLID PINE ONLY
8' ONLY




QUARTER ROUNDS MAY BE USED AS A BASE SHOE, INSIDE CORNER MOULDING, OR TO COVER ANY 90° RECESSED JUNCTURE.

BASE SHOES



TM 126 1/2" x 3/4" SOLID PINE ONLY RL - 8'



BASE SHOES:
APPLIED WHERE BASE MOULDING
MEETS FLOOR. PROTECTS BASE FROM
DAMAGE. CONCEALS UNEVEN LINES OR
CRACKS WHERE BASE MEETS FLOOR.

SHELF EDGE/SCREEN MOULD



TM 137 3/8" x 3/4" Solid Pine Only RL - 8'





TM 142 1/4" x 3/4" SOLID PINE ONLY RL - 8'



SCREEN MOULD: COVERS SEAM WHERE SCREENING IS FASTENED TO THE SCREEN FRAME.

SHELF EDGE: ALSO COVERS PARTICLE OR FLAKEBOARD SHELF EDGES.



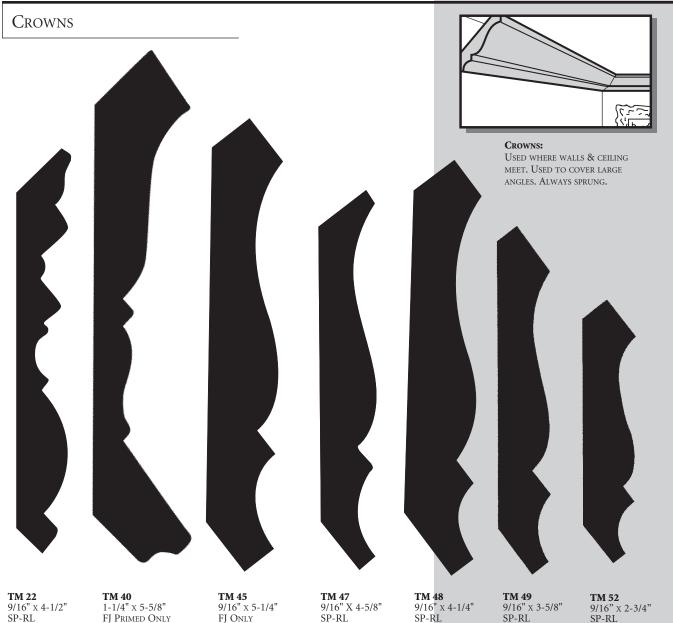

FJ PRIMED 16' Only

16' Only


16' Only

FJ RAW & FJ PRIMED 16' Only

FJ RAW & FJ PRIMED 16' Only

FJ RAW & FJ PRIMED 16' Only

PANEL MOULDS TM 184 11/16" X 1-5/16" SOLID PINE ONLY RL ONLY TM 186 7/16" x 1-1/16" SOLID PINE ONLY RL ONLY





SCREEN/S4S STOCK/SQUARE



TM 2393/4" x 3/4"
SOLID PINE ONLY
8' ONLY



TM 9603/8" x 2-1/4"
SOLID PINE ONLY
RL ONLY



TM 254 1/2" x 3/4" SP RL-8'


TM 246 11/16" x 2-3/4" SP RL ONLY FJ 16' ONLY

TM 248 11/16" x 1-3/4" SP RL & 8' FJ 16' Only

1 x 4 11/16" x 3-1/2" FJ Only 16' Only

1 x 6 11/16" x 5-1/4" FJ Only 16' Only

1 x 8 11/16" x 7-1/4" FJ Only 16' Only




SCREEN/S4S STOCK: SAME BASIC USES AS SQUARES.

BRICK MOULD





TM 1801-1/4" x 2"
FJ PRIMED 7', 17' & 18' - PRS MITERED 83-1/4"
FJ RAW 7' & 17'
SP RAW RL & 7'



BRICK MOULD:
USED AS AN EXTERIOR DOOR AND
WINDOW CASING. A THICK MOULDING
PROVIDES A SURFACE FOR BRICK OR
OTHER SIDING TO BUTT AGAINST.

BEDS

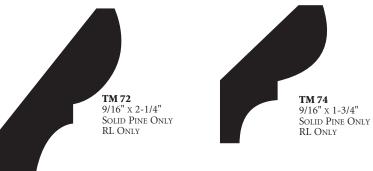



BEDS: USED WHERE WALLS & CEILING MEET. EITHER SPRUNG OR PLAIN.

PICTURE MOULDING



TM 276 11/16" x 1-3/4" SOLID PINE ONLY RL ONLY

GLASS BEAD



TM 1483/8" x 3/8"
SOLID PINE ONLY
RL ONLY



TM CM3 9/16" x 3/4" SOLID PINE ONLY RL ONLY

BASE CAPS



TM 1655/8" x 1-1/8"
SOLID PINE ONLY
RL ONLY



TM 163 11/16" x 1-3/8" SOLID PINE ONLY RL ONLY


CORNER GUARDS



TM 205 1-1/16" x 1-1/16" Solid Pine Only RL - 8'



CORNER GUARDS:
OUTSIDE (OS) CORNER
GUARD IS USED TO
PROTECT CORNERS OR
TO COVER RAGGED EDGE
WHERE WALL COVERING
AND PAINTED SURFACES
MEET AT OUTSIDE CORNER.



Fax: 303.371.0181

SPECIFIED LENGTHS

4


PANEL CAP

TM 287 11/16" x 1-5/16" SOLID PINE ONLY RL ONLY


WAINSCOT/PLY CAP



TM 291 3/4" x 1-15/16" SOLID PINE ONLY



TM 292 9/16" x 1-1/8" SOLID PINE ONLY RL - 8'



PLY CAP:
TURNS OUT THE UPPER EDGE OR
TOP OF A WAINSCOT. COVERS
PLYWOOD'S ROUGH SANDWICH EDGE IN
INSTALLATIONS WHERE IT IS EXPOSED
TO VIEW. ALSO CALLED A DADO CAP.

LATTICE



TM 2659/32" x 1-3/4"
SOLID PINE ONLY
RL - 8'

TM 267 9/32" x 1-3/8" SOLID PINE ONLY RL - 8'

TM 268 9/32" x 1-1/8" SOLID PINE ONLY RL - 8'









LATTICE: ORIGINALLY USED IN TRELLIS WORK. THIS SMALL, PLAIN S4S MOULDING IS AMONG THE MOST VERSATILE OF PROFILES.

T-ASTRAGALS



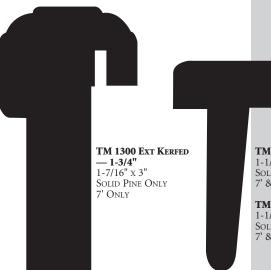




T-ASTRAGALS: AN ASTRAGAL, T-LIKE IN SHAPE, IS RABBETED TO THE APPROXIMATE THICKNESS OF THE SWINGING DOOR.


TM 1310 — 1-3/4" 1-1/4" x 2-1/4" SOLID PINE ONLY 7' & 8'

TM 1315 — 1-3/8" 1-1/4" x 2" SOLID PINE ONLY 7' & 8'

SPECIFIED LENGTHS

CHAIR RAIL

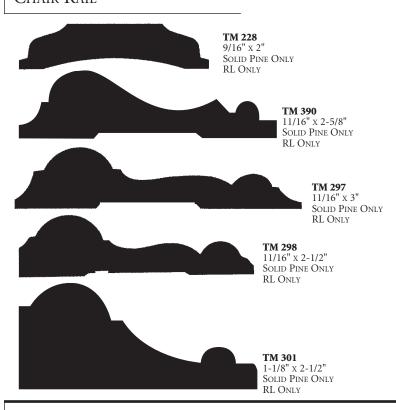



CHAIR RAIL: INTERIOR MOULDING APPLIED ABOUT ONE THIRD UP FROM THE FLOOR, PARALLELING BASE MOULDING AND ENCIRCLING THE ROOM. ORIGINALLY USED TO PREVENT CHAIRS FROM MARRING WALLS. USED TODAY AS A KEY DECORATIVE DETAIL IN TRADITIONAL AND COLONIAL DESIGN.

STOPS





TM 8767/16" x 1-3/8"
SOLID PINE ONLY
7' ONLY

TM 9067/16" x 1-3/8"
SOLID PINE ONLY
7' ONLY



TM 886SOLID PINE 3/8" X 1-3/8"
RL - 7'
FJ 3/8" X 1-3/8"
7' & 17'



TM 916 3/8" x 1-3/8" SOLID PINE RL - 7' FJ 7' - 17' FJ MITERED 80-5/8" & 96-5/8" FJ PRIMED & MITERED 80-5/8" ONLY




STOPS: IN DOOR TRIM, STOP IS NAILED TO THE FACES OF THE DOOR FRAME TO PREVENT THE DOOR FROM SWINGING THROUGH. AS WINDOW TRIM, STOP HOLDS THE BOTTOM SASH OF A DOUBLE-HUNG WINDOW IN PLACE. ALSO USED AS AN APRON UNDER WINDOW STOOLS.


CHAMFER STRIP




TM 995 3/4" x 3/4" SOLID WHITE WOOD

CHAMFER STRIP: USED IN HIGHWAY AND DAM CONSTRUCTION FORMS, MAKING A CHAMFERED EDGE AT CONCRETE CORNERS. ALSO USED WHERE KITCHEN CABINET TOPS MEET THE WALL. ALSO USED AS A LINOLEUM COVE (UNDER LINOLEUM WHERE IT EXTENDS UP THE WALL.)





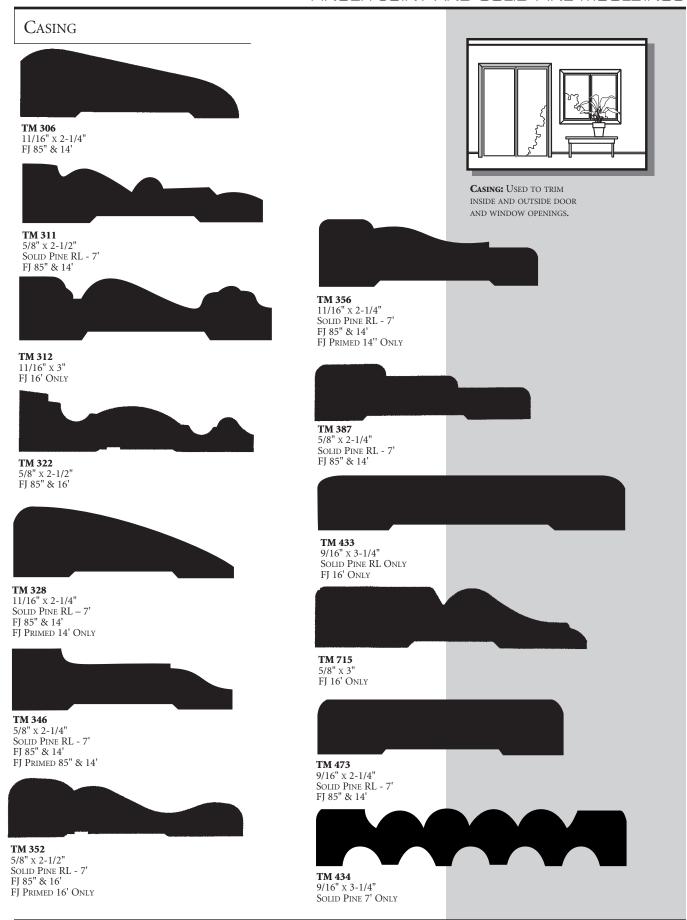

8

BASE MOULDINGS



TM 444 11/16" x 3-1/2" Solid Pine RL Only FJ 16' Only



TM 6189/16" x 5-1/4"
SOLID PINE RL ONLY
FJ 16' ONLY
FJ PRIMED 16' ONLY

 TM 623
 TM 634

 9/16" x 3-1/4"
 1/2" x 2-1/2"

 SOLID PINE RL - 8'
 SOLID PINE RL & 8'

 FJ & FJ PRIMED 16' ONLY
 FJ 16' ONLY

TM 620 9/16" x 4-1/4" FJ PRIMED 16' ONLY



TM 713 9/16" x 3-1/4" FJ PRIMED 16' ONLY




TM 723 9/16" x 3-1/4" SOLID PINE RL - 8' FJ 16' ONLY




TM 7241/2" x 2-1/2"
SOLID PINE RL ONLY
FJ 16' ONLY
TM 726
1/2" x 2-1/4"
SOLID PINE RL ONLY
FJ 16' ONLY
FJ 16' ONLY





TM 822 9/16 x 3-1/4 FJ 16' Only FJ Primed






BASE MOULDINGS: APPLIED WHERE FLOOR AND WALLS MEET, FORMING A VISUAL FOUNDATION. PROTECTS WALLS FROM KICKS, BUMPS, FURNITURE, ETC. BASE MAY BE REFERRED TO AS ONE, TWO, OR THREE-MEMBER. BASE SHOE AND BASE CAP ARE USED TO CONCEAL UNEVEN FLOOR AND WALL JUNCTIONS.

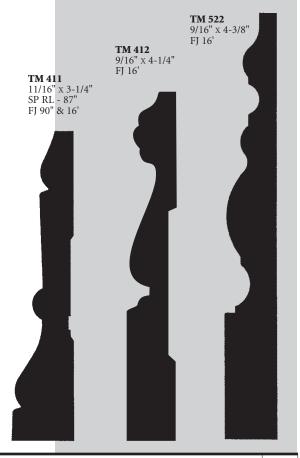

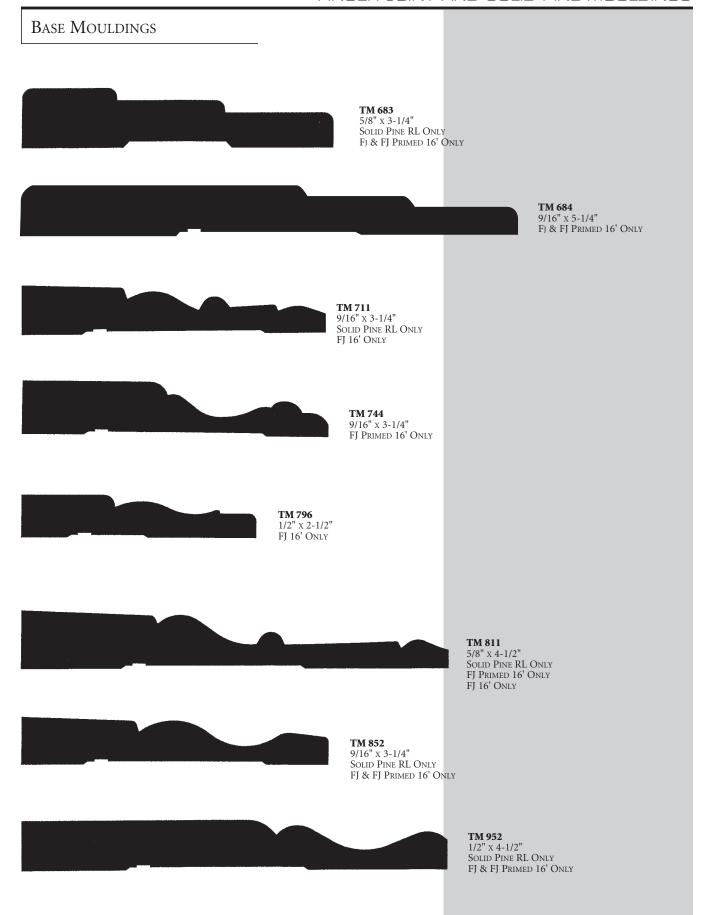


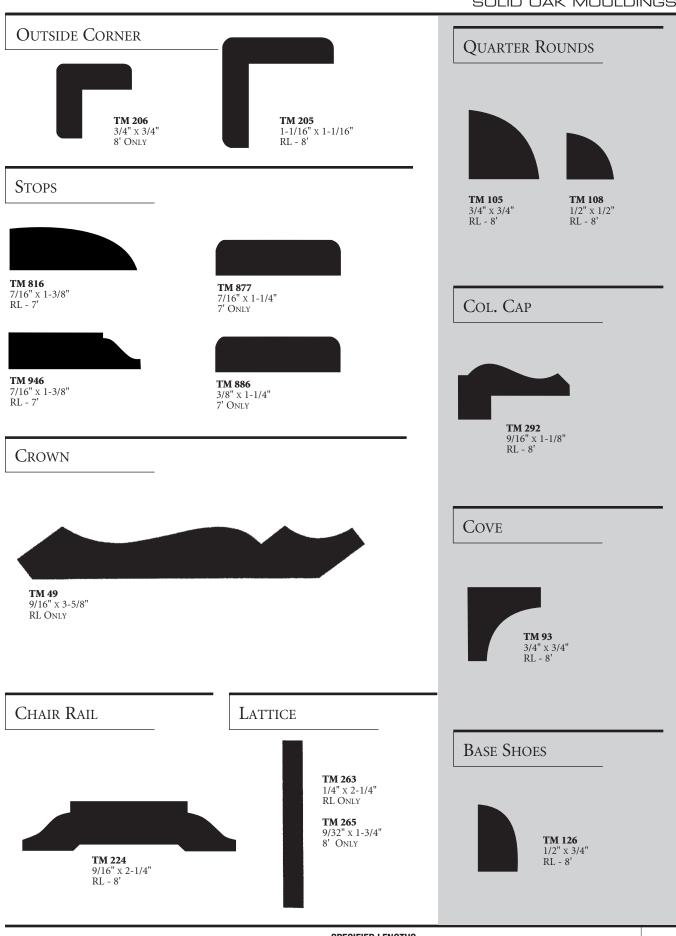


BASE MOULDINGS



TM 444 7/16" x 3-1/4" RL Only





BASE MOULDINGS: APPLIED WHERE FLOOR AND WALLS MEET, FORMING A VISUAL FOUNDATION. PROTECTS WALLS FROM KICKS, BUMPS, FURNITURE, ETC. BASE MAY BE REFERRED TO AS ONE, TWO, OR THREE-MEMBER. BASE SHOE AND BASE CAP ARE USED TO CONCEAL UNEVEN FLOOR AND WALL JUNCTIONS.



TM 6237/16" x 3-1/4"
RL & 8'

TM 634 3/8" x 2-3/4" RL Only



TM 683 7/16" x 3-1/4" RL Only



TM 713 7/16" x 3-1/4" RL - 8'

SHELF EDGE/SCREEN MOULD



TM 144 1/4" x 3/4" RL Only



TM 142 1/4" x 3/4" x 8'



TM 137 3/8" x 3/4" RL Only




SCREEN MOULD: COVERS SEAM WHERE SCREENING IS FASTENED TO THE SCREEN FRAME.

SHELF EDGE: ALSO COVERS PARTICLE OR FLAKEBOARD SHELF EDGES.




SPECIFIED LENGTHS

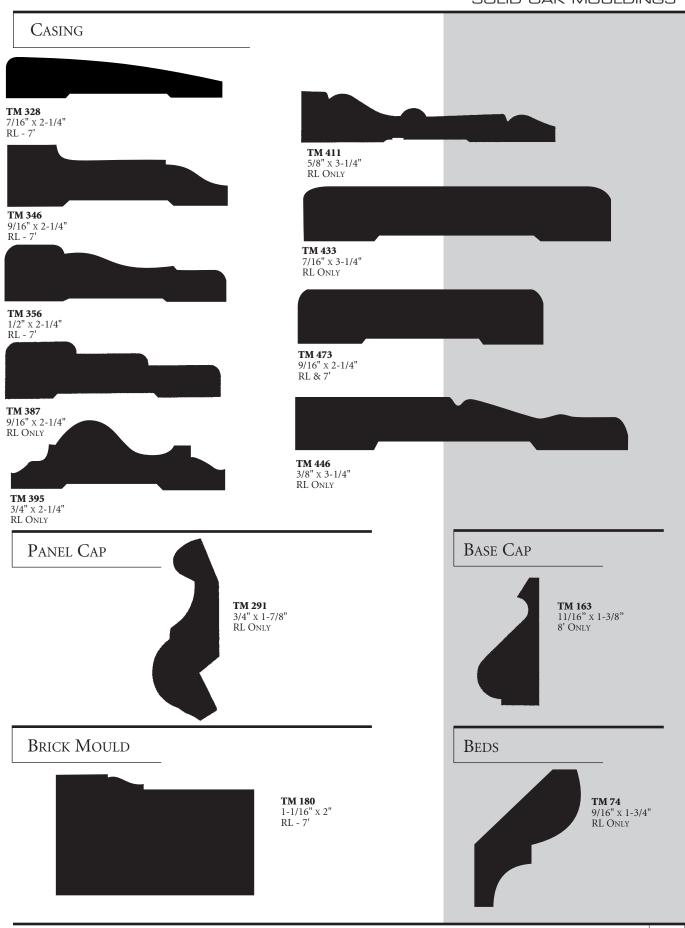

HAND RAIL



TM 231 1-1/2" x 1-11/16" 16' Only




HAND RAIL:USED AS A HAND SUPPORT IN A STAIRWELL.

Rounds




TM 233 1-5/16" RL Only



ROUNDS:MOST OFTEN USED AS A CLOSET POLE OR ROOM DIVIDER.

OAK S4S BOARDS

1 x 2	S4S	3/4" x 1-3/4"	RL - 8'
1 x 3	S4S	3/4" x 2-3/4"	RL
1 x 4	S4S	3/4" x 3-1/2"	RL
1 x 6	S4S	3/4" x 5-1/2"	RL
1 x 8	S4S	3/4" x 7-1/4"	RL
1 x 10	S4S	3/4" x 79-1/4"	RL
1 x 12	S4S	3/4" x 11-1/4"	RL

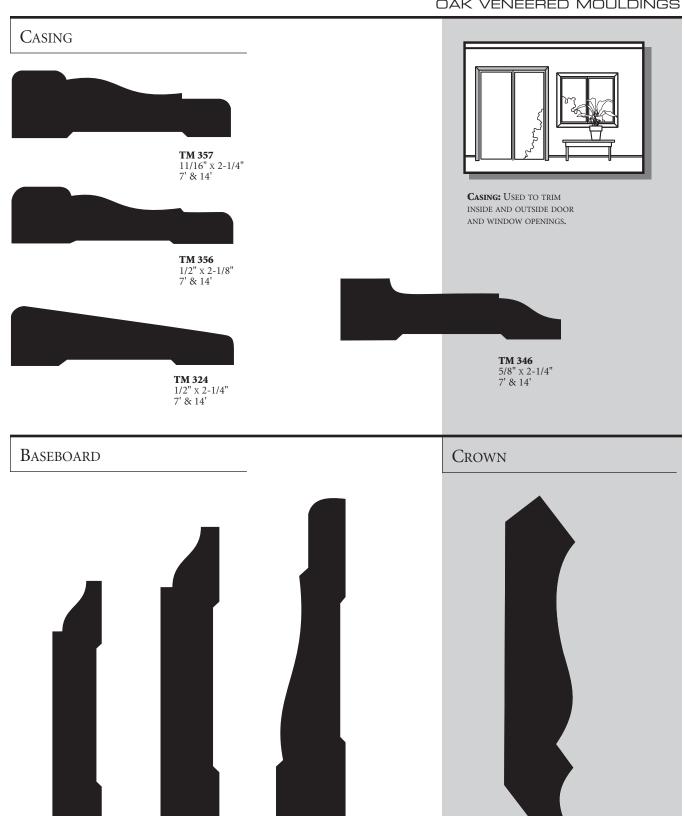


TM 444 5/8" x 3-1/4" 14' Only

TM 51 5/8" x 3-1/4" 14' Only


TM 636 3/8" x 2-3/4" 14' Only

TM 623 9/16" x 3-1/4" 14' Only

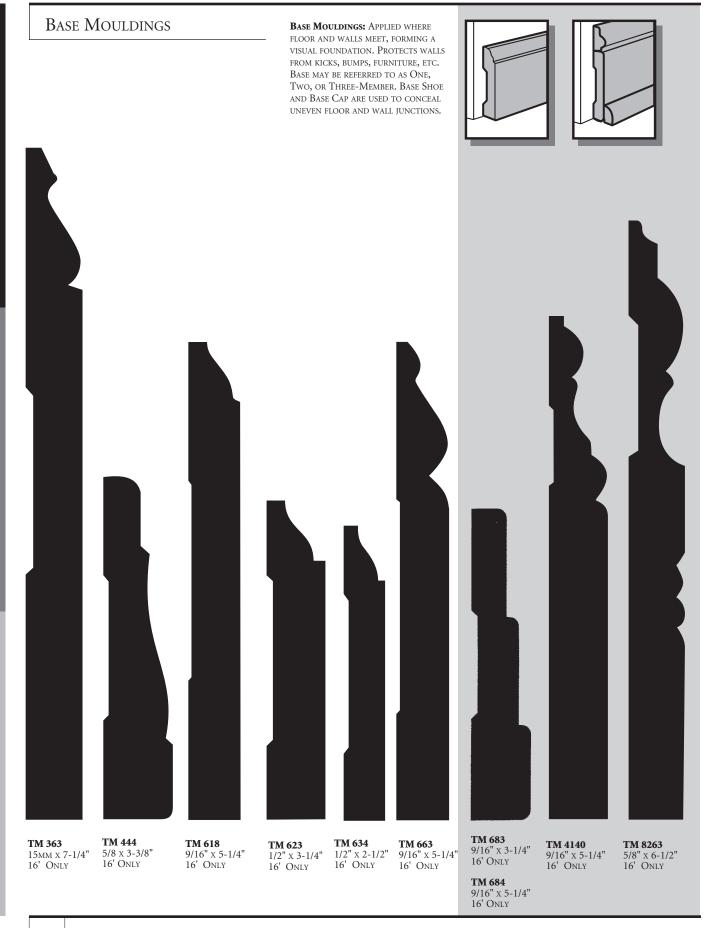



16 Phone: 303.371.8888



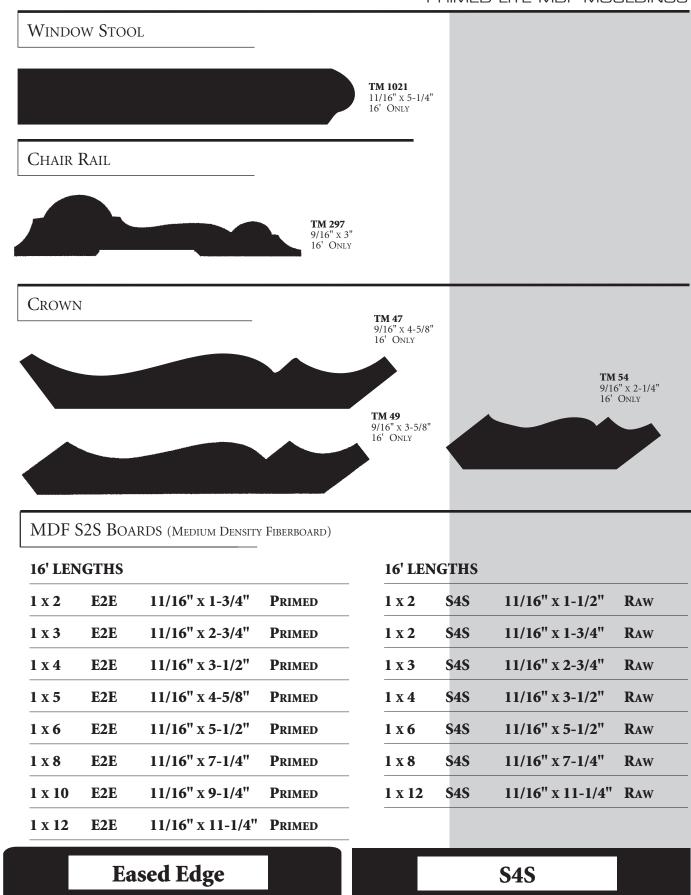

Phone: 303.371.8888

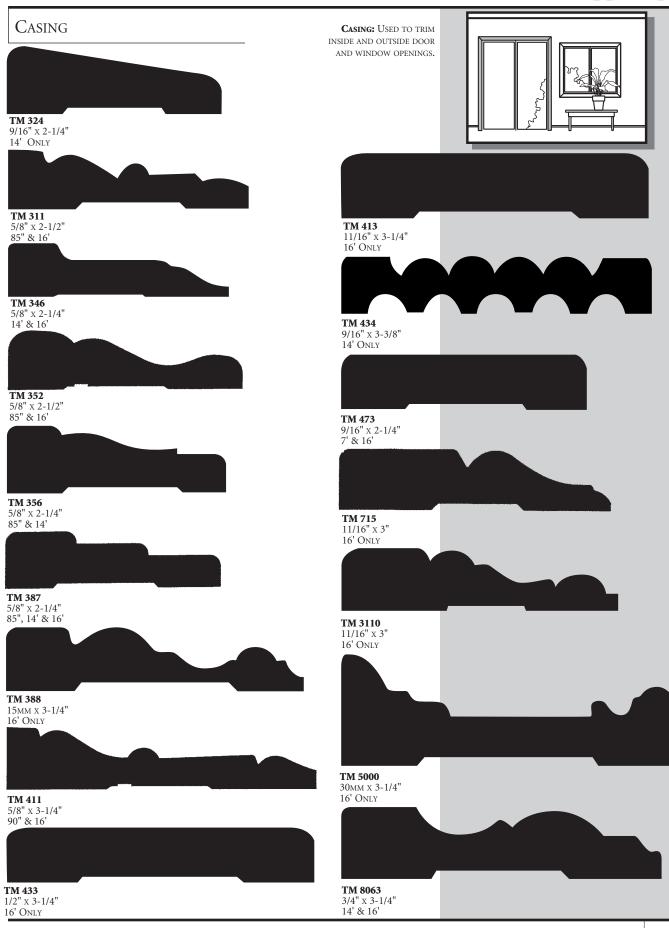

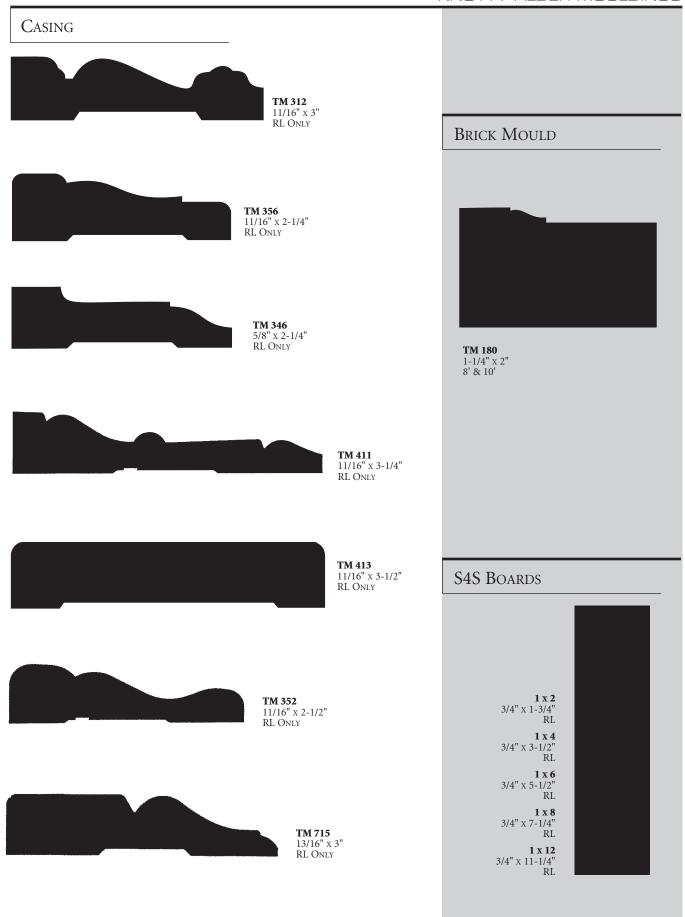


Phone: 303.371.8888


Base Mouldings



TM 623 9/16" x 3-1/4" RL ONLY

TM 618 9/16" x 5-1/4" RL Only





BASE MOULDINGS: APPLIED WHERE FLOOR AND WALLS MEET, FORMING A VISUAL FOUNDATION. PROTECTS WALLS FROM KICKS, BUMPS, FURNITURE, ETC. BASE MAY BE REFERRED TO AS ONE, TWO, OR THREE-MEMBER. BASE SHOE AND BASE CAP ARE USED TO CONCEAL UNEVEN FLOOR AND WALL JUNCTIONS.

TM 512 9/16" x 5-1/4" RL Only




TM 530 5/8" x 5-1/4" RL ONLY




TM 745 5/8" x 4-3/4" RL Only



TM 952 9/16" x 4-1/2" RL Only

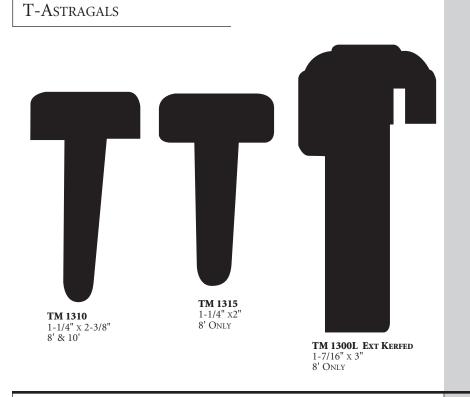



T-ASTRAGALS: AN ASTRAGAL, T-LIKE IN SHAPE, IS RABBETED TO THE APPROXIMATE THICKNESS OF THE SWINGING DOOR.







STOPS



STOPS: IN DOOR TRIM, STOP IS NAILED TO THE FACES OF THE DOOR FRAME TO PREVENT THE DOOR FROM SWINGING THROUGH. AS WINDOW TRIM, STOP HOLDS THE BOTTOM SASH OF A DOUBLE-HUNG WINDOW IN PLACE. ALSO USED AS AN APRON UNDER WINDOW STOOLS.





TM 887 3/8" x 1-1/4" 7' & 108"



TM 916 3/8" x 1-1/4" 7' & 108"

PHONE: 303.371.8888

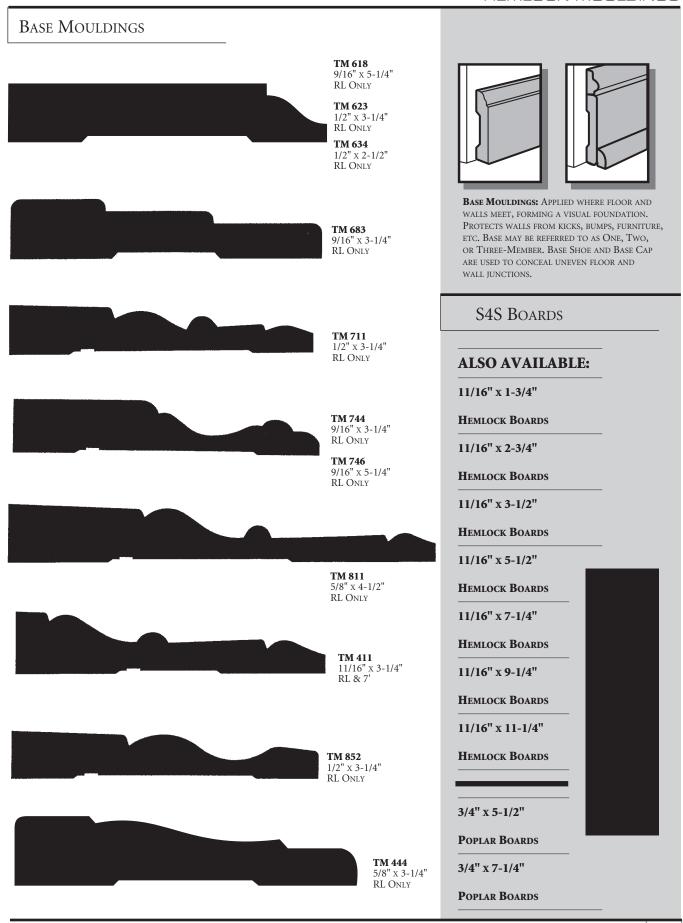


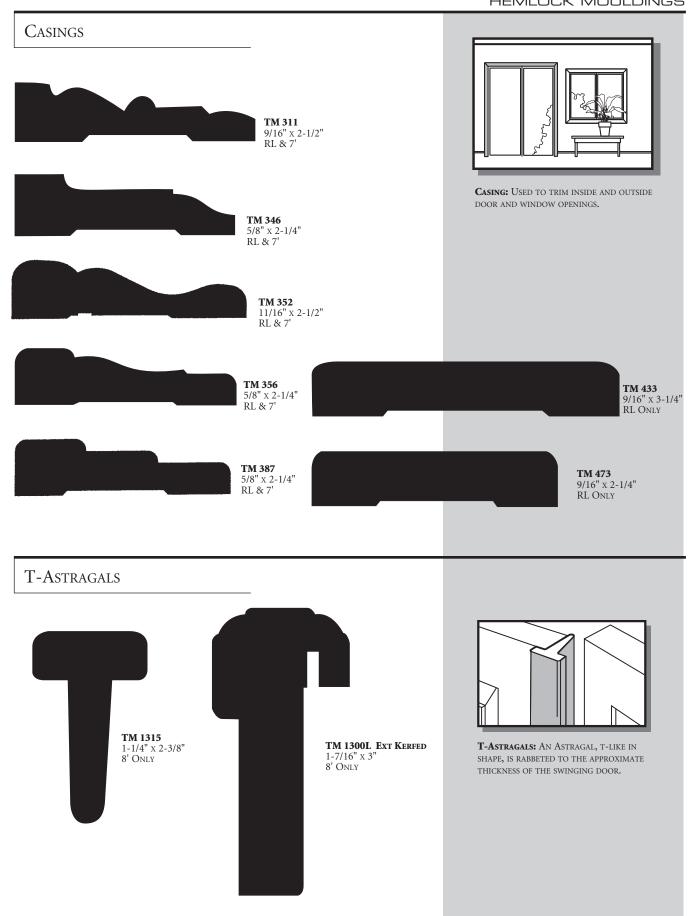

Rounds




TM 233 1-5/16" 8' & RL




ROUNDS:MOST OFTEN USED AS A CLOSET POLE OR ROOM DIVIDER.

Handrail




TM 231 1-1/2" x 1-11/16" 8' - RL

TM 1867 1-9/16" x 2" RL Only



HAND RAIL:USED AS A HAND SUPPORT IN A STAIRWELL.

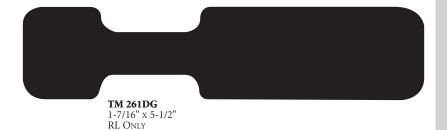




TM 260 1-7/16" x 5-1/2" RL Only

HEMLOCK MOULDINGS BRICK MOULD TM 180 1-1/4" x 2" RL & 7' **BRICK MOULD:** USED AS AN EXTERIOR DOOR AND WINDOW CASING. A THICK MOULDING PROVIDES A SURFACE FOR BRICK OR OTHER SIDING TO BUTT AGAINST. BASE SHOE TM 126 1/2" x 3/4" RL Only **BASE SHOES:** APPLIED WHERE BASE MOULDING MEETS FLOOR. PROTECTS BASE FROM DAMAGE. CONCEALS UNEVEN LINES OR CRACKS WHERE BASE MEETS FLOOR. STOP **TM 916** 3/8" x 1-3/8" RL & 7' STOPS: IN DOOR TRIM, STOP IS NAILED TO THE FACES OF THE DOOR FRAME TO PREVENT THE DOOR FROM SWINGING THROUGH. AS WINDOW TRIM, STOP HOLDS THE BOTTOM SASH OF A DOUBLE-HUNG WINDOW IN PLACE. ALSO USED AS AN APRON UNDER WINDOW STOOLS. **SQUARES TM 236** 1-7/16" x 1-7/16" RL & 48" TM 237 1-1/4" x 1-1/4" 48" ONLY

CORNER BLOCKS BULLSEYE DESIGN


AVAILABLE IN OAK, PINE, MDF, AND ALDER

* SIZES LISTED ON PRICE PAGES

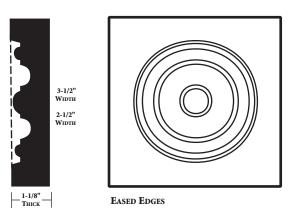

PLINTH BLOCKS


AVAILABLE IN OAK, PINE, MDF, AND ALDER

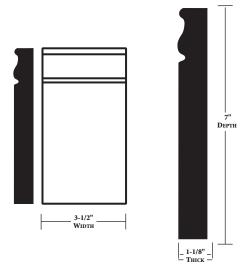


3/4" Radius Corners • These are just a few of the profiles we stock. We can match any moulding profile in the above woods.

AVAILABLE IN OAK, PINE, AND ALDER

* SIZES LISTED ON PRICE PAGES

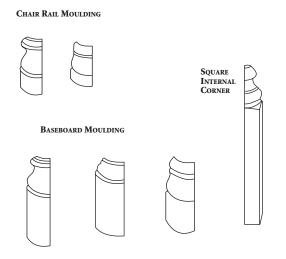

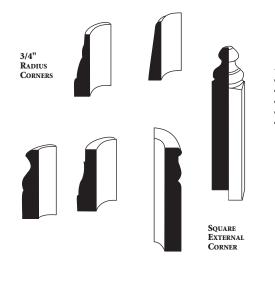

UNIVERSAL TM 356 TM 444 TM 618 TM 623 & OAK TM 811 & OAK

FLAT JAMBS

MDF PRIMED



X


4-7/8" FLAT JAMBS	82-1/4"	98-1/4"
SOLID PINE		X
PINE VENEER		X
FJ RAW	X	X
FJ PRIMED	X	
OAK VENEER LBR.	X	
KNOTTY ALDER	X	X
MDF PRIMED	X	

6-5/8" FLAT JAMBS	82-1/4"	98-1/4"
SOLID PINE		X
PINE VENEER	X	
FJ RAW	X	X
HEMLOCK VENEER	X	
OAK VENEER LBR.	X	X
KNOTTY ALDER	X	X

7-1/4" FLAT JAMBS	82-1/4"
FJ RAW	X
OAK VENEER LBR.	X

PHONE: 303.371.8888

EXTERIOR FRAMES

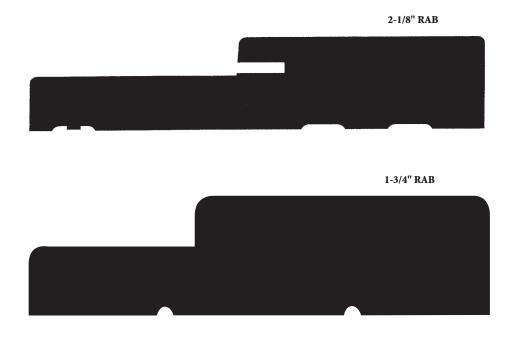

4-5/8" EXTERIOR FRAME	81-11/16"	82"	82-1/2"	82-3/4"	98-3/4"
SP 1-3/4" RAB			X		
SP Kerfed 2-1/8" Rab				X	X
FJ RAW KERFED 2-1/8" RAB			X		
FJ RAW KERFED 82-1/8" RAB			X		
No Sill Dado					
FJ Primed Kerfed 2-1/8" Rab	X	X		X	X
HEMLOCK KERFED 2-1/8" RAB			X		X
Oak 1-3/4" Rab			X		
Oak Kerfed 2-1/8" Rab			X		X
KNOTTY ALDER KERFED 2-1/8" RAB				X	X

4-7/8" EXTERIOR FRAME	81-11/16"	82"	82-1/2"	82-3/4"	98-3/4"
FJ RAW 1-3/4" RAB			X		
FJ RAW KERFED 2-1/8" RAB			X		
FJ PRIMED KERFED 2-1/8" RAB				X	

EXTERIOR FRAMES

5-1/4" EXTERIOR FRAME	81-11/16"	82"	82-1/2"	82-3/4"	98-3/4"
SP 1-3/4" RAB				X	
SP Kerfed 2-1/8" Rab				X	
FJ RAW 1-3/4" RAB			X		
FJ RAW KERFED 2-1/8" RAB			X		
FJ PRIMED KERFED 2-1/8" RAB				X	
Oak 1-3/4" Rab			X		
Oak Kerfed 2-1/8" Rab			X		

6-5/8" FIRE RATED FRAME	82-3/4"
FJ-FR Primed 2-1/8" Rab	X

SETS ONLY

6-5/8" EXTERIOR FRAME	81-11/16"	82"	82-1/2"	82-3/4"	98-3/4"	RL
SP 1-3/4" RAB						X
SP Kerfed 2-1/8" Rab				X	X	
FJ RAW KERFED 2-1/8" RAB			X			
FJ RAW KERFED 82-1/8" RAB				X		
No Sill Dado						
FJ Primed Kerfed 2-1/8" Rab	X	X		X	X	
HEMLOCK KERFED 2-1/8" RAB			X		X	
Oak 1-3/4" Rab			X			
Oak Kerfed 2-1/8" Rab			X		X	
KNOTTY ALDER KERFED 2-1/8" RAB				X	X	

6-7/8" EXTERIOR FRAME	81-11/16"	82"	82-1/2"	82-3/4"	98-3/4"
FJ Primed Kerfed 2-1/8" Rab					X
KNOTTY ALDER KERFED 2-1/8" RAB				X	

7-1/4" EXTERIOR FRAME	81-11/16"	82"	82-1/2"	82-3/4"	98-3/4"	RL
SP 1-3/4" RAB				X		
SP Kerfed 2-1/8" Rab					X	X
FJ RAW KERFED 2-1/8" RAB			X			
FJ Primed Kerfed 2-1/8" Rab				X		
HEMLOCK KERFED 2-1/8" RAB					X	

30 **PHONE: 303.371.8888**

Notes		
	-	

GRADE - Wood mouldings are available in two grades. "N Grade" is intended for natural or clear finishes and the exposed face must be of one single piece. "P Grade" is intended for opaque paint finishes or overlays and can be finger jointed and or edge glued.

These grades may have a few minor characteristics such as light checks, small pitch pockets, light torn grain, occasional medium stain or a small amount of medium pitch. A serious combination of these is not admissible in any one piece. The number and extent of characteristics permitted varies as the area of the piece increases or diminishes.

N-GRADE (suitable for natural, stain, paint, or enamel finish). On the basis of net 2" face—12' long this grade will admit the following characteristics or their equivalent:

- A. A small spot of torn grain, one foot of medium pitch, light skip in dressing on back, or
- B. One small and one very small pitch pocket, or
- C. One short, tight season check and a light snipe at one end, or
- D. Medium stain in occasional (10%) pieces for one third the area in an otherwise perfect piece.

Characteristics that will not show when piece is laid shall not be given the same consideration as characteristics elsewhere.

P-GRADE (paint or overlay grade)

The same quality as N-Grade except stain is no defect. Glue joints (laminated or finger joints) must be precision machined and assembled with tight joints. Patching, filling or plugging is permitted providing a paintable surface results.

LENGTHS

Random lengths shall be 3 to 20 feet in multiples of one foot. Not over 15% of any one item shall be under 8 feet. When computing the percentage of shorts in casing and stops, pieces 7' in length will be considered long lengths.

Specified lengths of cut to length window and door trim shall be graded as completely usable.

Finger and/or laminated jointed mouldings may be ordered in specified lengths with not over 15% trim backs permitted in any one item.

SPECIFIED LENGTHS

We reserve the option to charge a 25% premium on specified lengths of items normally sold on a random length basis. This policy applies mostly to Solid Pine, Oak and Hemlock mouldings.

ADHESIVES

Adhesives used in finger joints or laminations shall meet the dry used adhesive performance requirements of ASTM D-3110-82 (or latest revision) "Standard Specification for Adhesives Used in Non-Structural Glued Lumber Products."

In situations where a Wet-Use adhesive is required, it shall be so specified, acknowledged and invoiced.

BUNDLING shall be in accordance with the Standard Wood Moulding and Millwork Producers Association Schedule.

MANUFACTURING TOLERANCES

Thickness and width + or - 1/32"

DEFINITIONS

Definitions of characteristics permitted in wood mouldings shall be those of the National Grading Rules for softwood lumber.

SETTLEMENT PROVISIONS

In determining compliance with purchase specifications and of effecting settlement of invoices between buyers and sellers, each item of a shipment shall be considered as of the grade invoiced if upon re-inspection 95% thereof or more is found to be of said grade or better.

PHONE: 303.371.8888

Green's The Thing

At Trimco Millwork, we're not just trying to conserve energy and reduce our own carbon footprint, we're taking green to the next level by offering the finest, environmentally responsible building materials available. We offer a wide range of products that are made from recycled materials or are recycleable, as well as products from manufacturers that support the green initiatives of the organizations you see on this page. We are constantly searching for and adding high quality, green products to our inventory.

Go Green

To make it easier for our customers to find greener building materials we have developed **Go Green**, a selection of products that are easier on the earth through their manufacture, performance or use. Our **Go Green** offerings can help you meet your green product requirements.

Building Green With Trimco

The products listed below are a sample of the **Go Green** products we offer at Trimco Millwork:

MOULDING

ULTRALITE BOARDS
PAC-FIT / CAN TRIM - MDF
KNOTTY ALDER
FERCHE - OAK
SIERRA PACIFIC - FRAMES

DOORS

THERMA TRU - DOORS

TYPAR



For more information about Go Green products contact us at



14500 East 33rd Place Aurora, Colorado 80011 Phone: 303-371-8888

Toll Free: 1-800-574-4455

Fax: 303-371-0181



ATRINICO M I R W O R K

14500 East 33rd Place Aurora, Colorado 80011

Phone: 303-371-8888

Toll Free: 1-800-574-4455

Fax: 303-371-0181